




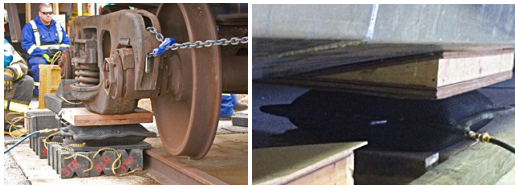

LIFTING BAGS



- High pressure air lifting bags require only 1" clearance and can lift up to 86 tons
- 3 or 4 layers of Aramid Fiber on both sides of the bag to create a lifting bag unequaled in strength and durability.
- Made in the USA and is ISO 9001/2008 and CE Certified
- Product replacement 3 year unconditional warranty.
- Marked with a distinct "bulls eye with tonnage rating"
- Conical, interlocking surface to limit slippage and aid in stacking.
- Each bag has either molded carry handles and/or tabs/eyelets

Model Number	Capacity (tons)	Max. Lifting Height (in)	Max Working Pressure (psi)	Reinforcing Material	Handles or Eyelets	Dimensions (in)			Weight (lbs)
						Length A	Width B	Deflated Ht C	
LB-1	1.5	2.5	120	Aramid	2 Eyelets	6.0	6.0	0.75	2.0
LB-3	3.3	3.0	120	Aramid	4 Eyelets	12.0	6.0	0.75	3.0
LB-6	6	4.5	120	Aramid	4 Eyelets	10.0	10.0	1.0	4.0
LB-13	13	7.5	120	Aramid	4 Eyelets	15.0	15.0	1.0	12.0
LB-15	15	7.5	120	Aramid	2 Eyelets	15.0	21.0	1.0	15.0
LB-22	22	9.5	120	Aramid	1 Handle	20.0	20.0	1.0	22.0
LB-32	32	11.0	120	Aramid	1 Handle	21.0	25.0	1.0	28.0
LB-37	37	9.0	120	Aramid	2 Handles	40.0	105.0	1.0	34.0
LB-50	50	15.0	120	Aramid	2 Handles	29.0	29.0	1.0	45.0
LB-70	70	18.0	120	Aramid	2 Handles	34.0	34.0	1.0	65.0
LB-86	86	24.0	120	Steel	4 Handles	42.0	42.0	1.0	118.0

SFA Companies

10939 N. Pomona Ave. • Kansas City, MO 64153 • Tel: 816-891-6390 Fax: 816-891-659
www.bvahydraulics.com • Email: sales@bvahydraulics.com

BUILT TO LAST