



# BVA<sup>®</sup>

HYDRAULICS

**NEW!**

## Remote Manual Directional Valves

### Features:


- Designed and manufactured for safe operation to 10,000 psi
- Advance/Hold/Retract operation for use with single-acting or double-acting cylinders
- 4.5 gal/min. maximum flow capacity




**PR33**



**PR43C**

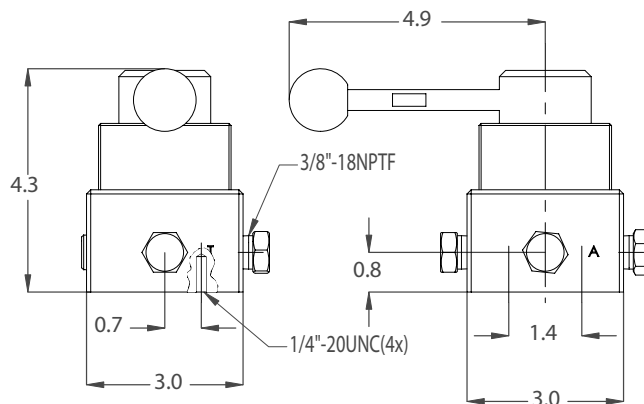

PR33

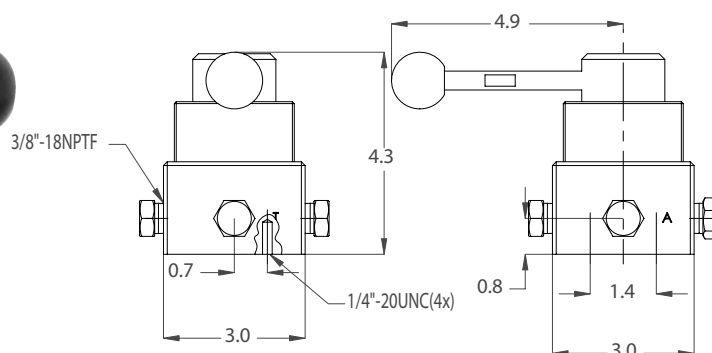

PR43C

| Valve Type                               | Model | Hydraulic Symbol | Schematic Flowpath |      |         |
|------------------------------------------|-------|------------------|--------------------|------|---------|
|                                          |       |                  | Advance            | Hold | Retract |
| 3-way,<br>3 position<br>Tandem<br>Center | PR33  |                  |                    |      |         |
| 4-way,<br>3 Position<br>Closed Center    | PR43C |                  |                    |      |         |

BUILT TO LAST