HW93733
20 Ton Truck Jack

Made in USA

Uses Standard Shop Air! [110-175 PSI pressure]

Large 8″ rubber wheels

Pressure relief valve prevents overloading

Rapid two-speed air hydraulic action quickly advances ram to load

Specially coated ram prevents rust and extends jack life

Low height allows lifting from axle or suspension

HW93265
Saddle Extension Kit
(Optional, for use only on HW93733)

Adds 1/2″, 2-3/8″, or 4″ to low pick-up heights

Optional adapters provide added height

Model	Capacity	Minimum Height	Maximum Height	Power Raise	Handle Length	Base Size	Extension Screw	Operating Pressure	G.W.
HW93733	20 Ton	9-1/2″	20″	5″	52-1/2″	20-1/2″ x 13″	5-1/2″	110-140 PSI	97 Lbs.

HW93731
20 Ton Truck Jack

Made in USA

Large rubber wheels enhance mobility

Extension screw permits pickup height adjustment

Speed Pak ™ provides quick, effortless lift

Model	Capacity	Minimum Height	Maximum Height	Power Raise	Handle Length	Base Size	Extension Screw	Operating Pressure	G.W.
HW93731	20 Ton	9-3/8″	17-5/8″	5-1/2″	39-1/2″	8-3/4″ x 5-1/2″	2-3/4″	110-150 PSI	69 Lbs.

HW93735A
25 Ton Truck Jack

Made in USA

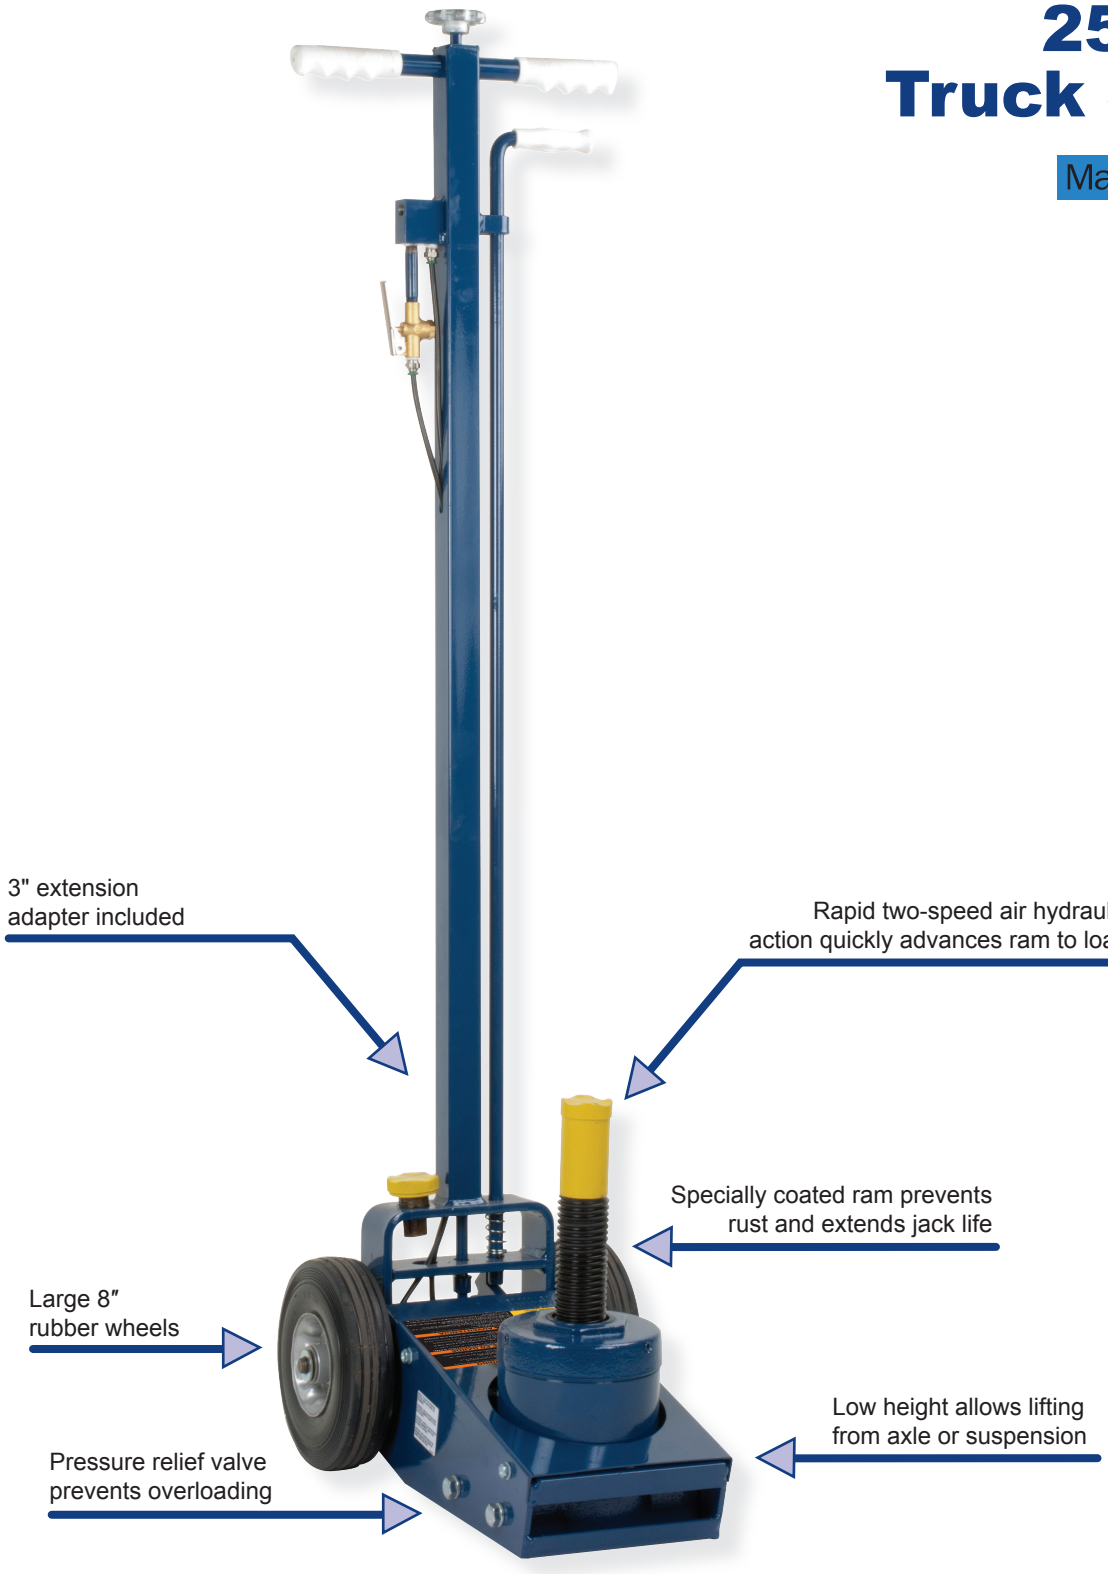

Model	Capacity	Minimum Height	Maximum Height w/adaptor	Power Raise	Handle Length	Base Size	Extension Screw	Operating Pressure	G.W.
HW93735A	25 Ton	8-1/4"	21-1/2″	5-1/8"	53"	20" x 14"	5-1/8"	110-200 PSI	118 Lbs.