

HW93733 20 Ton Truck Jack

Made in 

Uses
Standard Shop Air!
[110-175 PSI pressure]

HW93265 Saddle Extension Kit

(Optional, for use only on HW93733)

Adds 1/2", 2-3/8", or 4"
to low pick-up heights

Optional adapters provide
added height



Pressure relief valve
prevents overloading

Rapid two-speed air hydraulic
action quickly advances ram to load

Specially coated ram prevents
rust and extends jack life

Low height allows lifting
from axle or suspension

Large 8"
rubber wheels

Model	Capacity	Minimum Height	Maximum Height	Power Raise	Handle Length	Base Size	Extension Screw	Operating Pressure	G.W.
HW93733	20 Ton	9-1/2"	20"	5"	52-1/2"	20-1/2" x 13"	5-1/2"	110-140 PSI	97 Lbs.

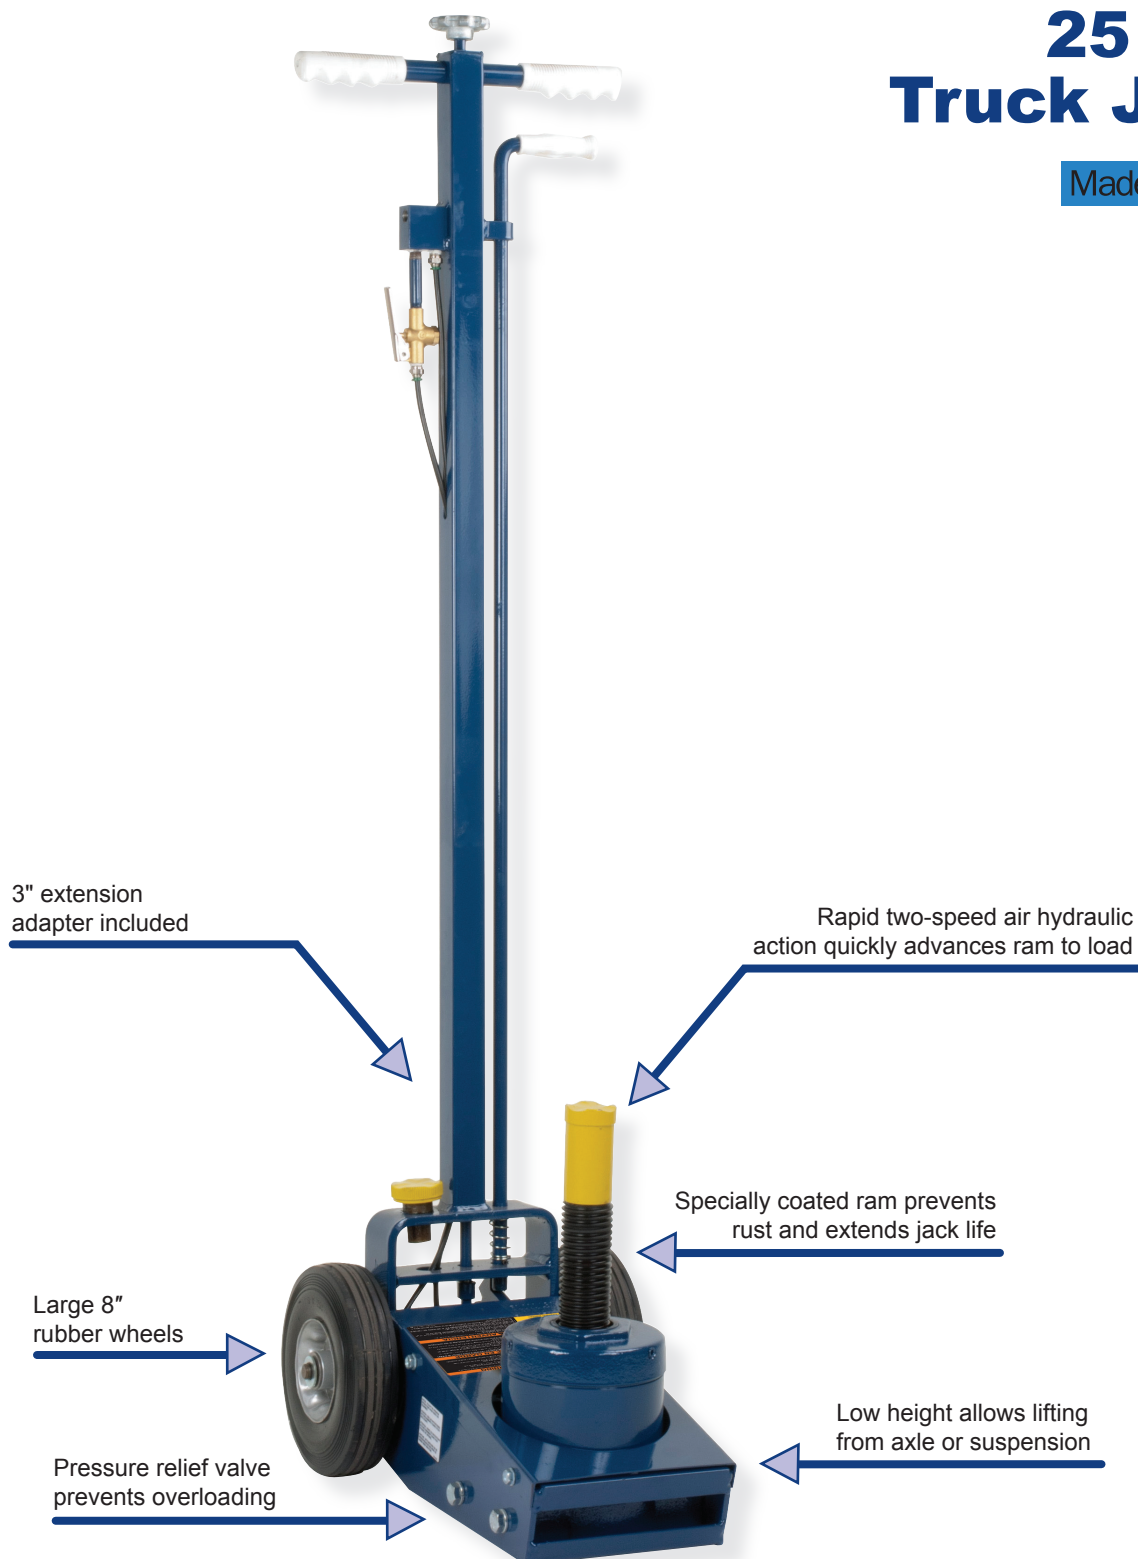
HW93731 20 Ton Truck Jack

Made in  USA



Model	Capacity	Minimum Height	Maximum Height	Power Raise	Handle Length	Base Size	Extension Screw	Operating Pressure	G.W.
HW93731	20 Ton	9-3/8"	17-5/8"	5-1/2"	39-1/2"	8-3/4" x 5-1/2"	2-3/4"	110-150 PSI	69 Lbs.

HW93735A 25 Ton Truck Jack

Made in 

Model	Capacity	Minimum Height	Maximum Height w/adaptor	Power Raise	Handle Length	Base Size	Extension Screw	Operating Pressure	G.W.
HW93735A	25 Ton	8-1/4"	21-1/2"	5-1/8"	53"	20" x 14"	5-1/8"	110-200 PSI	118 Lbs.